

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number  
**WO 2004/024007 A1**

- (51) International Patent Classification<sup>7</sup>: **A61B 17/16**
- (21) International Application Number: **PCT/IB2003/004008**
- (22) International Filing Date:  
12 September 2003 (12.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/411,236 16 September 2002 (16.09.2002) US  
60/411,237 16 September 2002 (16.09.2002) US
- (71) Applicant (for all designated States except US): **PREC-IMED S.A.** [CH/CH]; L'Echelette 7, CH-2534 Orvin (CH).
- (72) Inventors; and  
(75) Inventors/Applicants, (for US only): **DESARZENS, Yves** [CH/CH]; Grand-Ruc 12, CH-2606 Corgémont (CH). **DAVIES, Hugh** [GB/CH]; Chemin des Rochettes 1, CH-2523 Lignieres (CH). **WHITE, Michel, Patrick** [US/US]; 1213 Indian Trail Drive, Downingtown, PA 19345 (US). **LECHOT, André** [CH/CH]; Sous l'Fau-Belle 24, CH-2534 Orvin (CH).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **INSET ACETABULAR REAMER COUPLING**

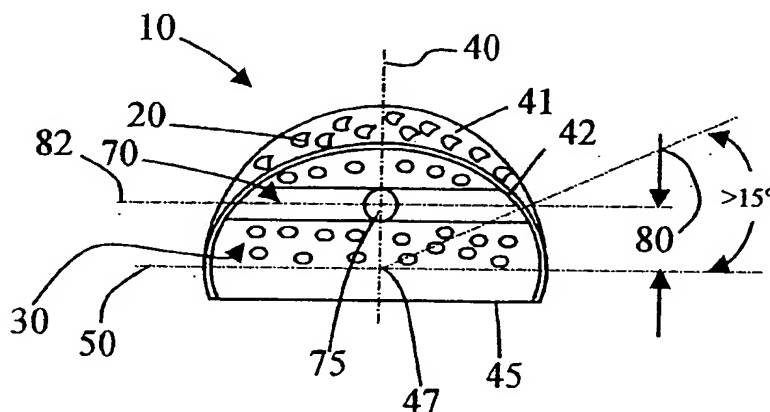

(57) Abstract: An acetabular reamer for surgical use includes (a) a substantially hemispherical dome defining an equatorial plane, and (b) a reamer spindle interface structure fixedly attached to the inside of the dome so as to substantially inset the interface structure within the dome. This inseting of the interface structure helps minimize the size of an assembly of the reamer and a reamer spindle when performing minimally invasive joint surgery.

WO 2004/024007 A1

- 1 -

## INSET ACETABULAR REAMER COUPLING

## CROSS REFERENCE TO RELATED APPLICATIONS

5           This is a PCT application designating the United States, and for the purposes of the United States, should be considered a US continuation-in-part application claiming priority under §120 to US patent applications serial number 60/376479 entitled "Reamer Spindle for Minimally Invasive Joint Surgery", filed April 30, 2002 and serial number 60/384186 entitled "Easy Clean Minimally Invasive Surgical Reamer", filed on May 5, 2002, both which are  
10           incorporated herein by reference thereto and relied upon.

## BACKGROUND OF THE INVENTION

15           This invention relates to mounting and inseting reamer couplings inside of acetabular reamer shells for the purpose of minimizing the size of the reamer and reamer coupling assembly when performing minimally invasive joint surgery.

          Orthopedic surgeons have become quite familiar with using acetabular reamers for joint reconstructive surgery. In particular, most instrument sets available to the surgeons include modular acetabular reamer shells ranging anywhere from 36mm to 80mm in spherical  
20           diameter, this range of size being useful for reshaping the cotyloid cavity during hip surgery. These reamers are usually configured to mount on a reamer spindle with some type of coupling acting as the interface. An example of a typical coupling is shown in US Patent No. 5,658,290 to Lechot, in US Patent No. 4,023,572 to Weigand, and WO 99/47051 to Fishbein, the contents of which are incorporated by reference hereto. These predicate designs show  
25           various cross connectors, bayonet connectors as well as a single bar having a centering boss or hole. All of these couplings allow the modular reamer handle to be connected in a simple manner to the reamer so that the reamer and the handle are fixed together so that their interface is in close proximity to the center of the spherical portion of the reamer. Many of these designs have become the state of the art and can typically be found in use at surgical  
30           centers. Although these designs have been successful in the current market, market demand for minimally invasive surgery is increasing. This trend pressures surgeons to make much smaller incisions to access the femoral and acetabular cavities for reconstructive hip surgery, thus increasing demand for specialized instruments. Generally, smaller incisions result in much less blood loss and quicker patient recovery times, thus significantly improving surgical  
35           outcome both from the perspective of the patient and the insurance companies which pay for the recovery costs incurred as a result of these types of surgical procedures. The increased demand for minimally invasive surgery has in turn created an increased demand to decrease the size of instruments which are to be introduced into the patient and consequently has begun to substantially change the design of surgical instruments. One means of helping minimize

- 2 -

the invasiveness of surgery is by reducing the size of the surgical reamer as proposed in the Lechot US 6,106,536 patent entitled "Surgical reamer". This patent describes a portion of a sphere suspended from a cross connector on a shaft. While the designs of the Lechot '536 patent and other smaller profile reamers solve one aspect of the problem, there are other challenges faced by the surgeons while exercising this new technique. During surgery, the patient's femoral neck must be resected and the femoral bone disengaged from the acetabular socket. Because of the limited amount of room brought about by the smaller incision, it becomes much more difficult to position the femoral bone so as to provide the space necessary to ream the acetabular socket. As a result, the spindle of the reamer or shaft impinges either on the femoral bone or on the edge of the incision, thus making it difficult to properly prepare the cotyloid cavity. Others have sought to solve this problem of impingement by mounting a substantially hemispherical shell of the prior art onto a fixed angled reamer driver. However, the mechanism in the driver still impinged on the bone during cutting.

What is needed therefore is a surgical reamer assembly that reduces impingement on the femoral bone as well as the size of the incision during minimally invasive joint surgery. Further, what is needed is a surgical reamer with a connector that is compatible with existing instrumentation and can be used universally for both minimally invasive surgical approaches and traditional surgical approaches.

## BRIEF DESCRIPTION OF DRAWINGS

The attached drawings represent, by way of example, different embodiments of the subject of the invention.

FIG. 1 is a side view of the preferred inset reamer cross coupling of the present invention.

FIG. 2 is a bottom view of the preferred inset reamer cross coupling of the present invention.

FIG. 3 is a side view of an inset reamer cross coupling mounted on a central post.

FIG. 4 is a bottom view of the inset reamer coupling shown in FIG. 3.

FIG. 5 is a side view of an inset bayonet reamer coupling.

FIG. 6 is bottom view of the inset reamer coupling shown in FIG. 5.

FIG. 7 is an isometric view of a reamer coupling having an inset bar with a boss.

FIG. 8 is an isometric view of a reamer coupling having an inset bar with a centralizing hole.

FIG. 9 is a side view of a reamer coupling of the prior art mounted on a minimally invasive reamer handle.

FIG. 10 is a side view of a reamer coupling of the present invention mounted on a minimally invasive reamer handle.

#### DETAILED DESCRIPTION OF DRAWINGS

5

Referring now to FIGs. 1 – 2, a hollow acetabular reamer 10 for surgical use is shown. The reamer 10 includes a substantially hemispherical hollow dome or shell defining a rotational axis 40, an equatorial plane 50 (i.e., the plane comprising the equator and intersecting the rotational axis 40 at the center 47 of the sphere 41) and an apex. The acetabular reamer 10 has apertures 20 through the shell allowing reamed tissue and debris to pass into the central cavity 30 during cutting. The reamer 10 has a rotational axis 40 and is formed as a portion of a sphere 41 having a first cutaway side 42 and a second cutaway side 45. As described by one of the present inventors in the Lechot '536 patent, the first cut away side 42 allows the static insertion profile of the reamer 10 to be smaller than the dynamic profile and thus, when statically inserting the reamer through an incision, the reamer passes through the incision without as much tissue damage as would take place if the portion of the sphere were not removed.

A reamer spindle interface structure or connector 70 is fixedly attached to the inside of the dome at a junction located to substantially inset the interface structure within the dome. This insetting of the interface structure 70 helps minimize the size of an assembly of the reamer 10 and a reamer spindle 500, 600 (shown in Figs. 9 and 10) when performing minimally invasive joint surgery.

In rotation about the axis 40, the reamer shell 10 sweeps a hemispherical volume defining a dynamic profile (i.e., the cutting profile). Although it is common for the second side 45 to be coincident to the equatorial plane 50, optionally, it can be offset angularly or manufactured parallel to it as shown in FIG. 1. An interface structure or connector in the form of a cross 70 is mounted to the inside of the central cavity 30. The cross 70 is formed from radial spokes 75 and is the structure that acts as an interface between the sphere 41 and the handle (not shown). The cross 70 is substantially inset from the hemispherical plane (i.e., equator) 50 by a set distance 80 into the central cavity 30 of the reamer shell 10. The latitudinal plane 82, along which the radial spokes 75 are located, is at least 15 degrees from the equator 50 of the hemisphere.

Referring now to FIGs. 3–4, a second embodiment of a hollow acetabular reamer shell 110 is shown with apertures 120 allowing reamed tissue and debris to move into the central cavity 130 during use. The shell 110 has a rotational axis 140 and is formed as a portion of a sphere 141 having two cutaway sides 142 and a rim 145. In rotation about the axis 140, the reamer shell 110 has a hemispherical plane 150 which intersects the axis at the center 147 of

35

- 4 -

the sphere 141. It is common, as shown, for the rim 145 to be coincident to the hemispherical plane 150. A connector in the form of a cross 170 is mounted on a shaft 172 coincident with the axis 140 and is attached to the central cavity 130 near the apex 173. The cross 170 is formed from radial spokes 175 and acts as an interface between the sphere 141 and the handle (not shown). The cross 170 is substantially inset from the hemispherical plane 150 by a distance 180 into the central cavity 130 of the reamer shell 110. Note that here again, the two cutaway sides 142 contribute to further reducing the invasiveness of surgery using this device in a manner similar to the cutaway side 42 in the prior embodiment.

Referring now to FIGs. 5-6, a third embodiment of the hollow acetabular reamer shell 210 is shown with apertures 220 allowing reamed tissue and debris to pass into the central cavity 230 during cutting. The shell 210 has a rotational axis 240 and is formed as a portion of a sphere 241 having curved cutaway sides 242 (thus reducing invasiveness) and a rim 245. In rotation about the axis 240, the reamer shell 210 has a hemispherical plane 250 which intersects the axis at the center 247 of the sphere 241. It is common, as shown, for the rim 245 to be coincident to the hemispherical plane 250. A connector in the form of a bayonet 270 is mounted on a shaft 272 which is coincident with the axis 240 and is attached to the central cavity 230 near the apex 273. The bayonet 270 is formed from two radial spokes 275 and acts as an interface between the sphere 241 and the handle (not shown). The bayonet 270 is substantially inset from the hemispherical plane 250 by a distance 280 into the central cavity 230 of the reamer shell 210.

Referring now to FIG. 7, a fourth embodiment of the hollow acetabular reamer shell 310 is shown with apertures 320 allowing reamed tissue and debris to pass into the central cavity 330 during cutting. The shell is formed as a hemisphere 341 having a rim 345. A connector in the form of a unitary bar 370 with a central embossed portion 375 is mounted to the inside of the central cavity 330. The bar 370 acts as an interface between the sphere 341 and the handle (not shown). The unitary bar 370 is substantially inset from the hemispherical rim 345 as illustrated by dimension 380.

Referring now to FIG. 8, a fifth embodiment of the hollow acetabular reamer shell 410 is shown with apertures 420 allowing reamed tissue and debris to pass into the central cavity 430 during cutting. The shell is formed as a hemisphere 441 having a rim 445. A connector in the form of a unitary bar 470 has a central alignment hole 475. The connector is mounted to the inside of the central cavity 430 and acts as an interface between the sphere 441 and the handle (not shown). The unitary bar 470 is substantially inset from the hemispherical rim 445 as illustrated by dimension 480.

FIG. 9 generally shows an instrument assembly 500 having an angled reamer spindle 510 which has at least one angular offset 515 to reorient the driven end 520 off the rotational

- 5 -

axis 525 for the purpose of avoiding soft tissue and bone impingement during reaming of the cotyloid cavity. The spindle 510 has a drive axis 527 parallel to the rotational axis 525 and offset by a distance 528. The assembly 500 is equipped with a grip 529 for guiding the reamer along the rotational axis 525 during use. The reamer spindle 510 is coupled in a fixed  
5 relative position to a spherical reamer 530 to form the assembly 500. Assemblies 500 of this type have been used in surgery and have realized vast improvement over straight spindle assemblies insofar as reducing soft tissue impingement is concerned.

When the driven end 520 is turned by a source of rotary power, the reamer 530 turns, thereby allowing the surgeon to transmit torque to affect the bone cut. The spherical reamer  
10 530 is shown with a cross coupling 535 mounted through the hemispherical plane passing generally through the center of the reamer 530 and is useful for coupling the reamer to the spindle 510. The reamer 530 has a portion of a sphere which has been removed by cutting away a side 537 to create a low profile reamer 530 as described above in prior embodiments. Thus, when used with an angled reamer spindle 510, the surgeon gains multiple benefits.  
15 These improvements have proven quite successful. Nevertheless, due to different emerging surgical protocols, problems with bone impingement still exist using this assembly 500. In particular, the bend point 540 still impinges the bone. In an effort to avoid impingement, the reamer spindle 510 was shortened; however, mechanical constraints do not allow the assembly to become any shorter. In particular, the front portion can only be reduced to somewhere  
20 between 30mm and 45mm, depending on the design.

Therefore, referring now to FIG. 10, the mechanical constraint is shown to be reduced by substantially inseting the coupling into the reamer shell as depicted by dimension 550. FIG. 10 generally shows an instrument assembly 600 having an angled reamer spindle 610 which has at least one angular offset 615 which reorients the driven end 620 off the rotational  
25 axis 625 for the purpose of avoiding soft tissue and bone impingement during reaming of the cotyloid cavity while performing minimally invasive joint surgery. The spindle 610 has a drive axis 627 parallel to the rotational axis 625 and offset by a distance 628. It is equipped with a grip 629 for guiding the reamer along the rotational axis 625 during use. The reamer spindle 610 is coupled in a fixed relative position to a spherical reamer 630 to form the  
30 assembly 600. When the driven end 620 is turned by a source of rotary power, the reamer 630 turns, thereby allowing the surgeon to transmit torque in order to effectively cut the bone. The spherical reamer 630 is specifically shown with a cross coupling 635 substantially inset into the reamer as shown in FIGs. 1-2 at 80 and can be substituted more generally with other spherical reamers that present alternative inset couplings such as those shown in FIGs. 3-8 at  
35 180, 280, 380 and 480. Assemblies 600 of this type solve the impingement issues faced by the surgeon in all surgical protocols. Further, when used with a low profile reamer 630, the

- 6 -

surgeon gains multiple benefits. These improvements have proven quite successful and, compared to the assembly 500 shown in FIG. 9, the bend point 640 has a dimension 650 which is much shorter and closer in to the shell. Therefore, effectively, the dimension 650 is somewhere between 5mm to 35mm shorter than dimension 550 from the prior art coupling.

5 Any bend configuration of the spindle can be used as a substitute for the spindle 510 and 610 shown in these embodiments. In particular, all spindles described in the incorporated applications US 60/376479 entitled "Reamer Spindle for Minimally Invasive Joint Surgery" and US 60/384186 entitled "Easy Clean Minimally Invasive Surgical Reamer" are preferred substitutions for the reamer spindles 510 and 610. These spindles 510 and 610 are disclosed

10 to further illustrate the offset parallel spindle embodiment described in application 60/384186, but not shown here.

The benefits of substantially inseting a coupling which interlocks in a fixed relative position with a spindle can be applied to all types of hollow shell acetabular reamers whether or not they have a small profile. In fact, multiple variations and modifications are possible in

15 the embodiments of the invention described here. Although certain illustrative embodiments of the invention have been shown and describe here, a wide range of modifications, changes, and substitutions is contemplated in the foregoing disclosure. In some instances, some features of the present invention may be employed without a corresponding use of the other features. Accordingly, it is appropriate that the foregoing description be construed broadly

20 and understood as being given by way of illustration and example only, the spirit and scope of the invention being limited only by the claims, without prejudice to the amendments made during prosecution.

**What is claimed is:**

1. An acetabular reamer for surgical use, the reamer comprising
  - (a) a substantially hemispherical, hollow dome defining an equatorial plane and an apex, and
  - 5 (b) a reamer spindle interface structure fixedly attached to the inside of the dome so as to substantially inset the interface structure within the dome in order to help minimize the size of an assembly of the reamer and a reamer spindle when performing joint surgery.
2. The acetabular reamer of claim 1, wherein the interface structure is attached via  
10 at least one internal junction which is substantially entirely recessed within the dome above the equatorial plane.
3. The acetabular reamer of claim 1, wherein the dome has at least one section removed so as to reduce a static insertion profile of the reamer, as compared to a dynamic profile, in order to facilitate surgery which is less invasive.
- 15 4. The reamer of claim 1, wherein a plurality of sections of the dome are removed so as to reduce a static insertion profile of the reamer in order to permit surgery which is still less invasive.
5. The reamer of claim 4, wherein the removed sections are equally spaced about the equator of the dome.
- 20 6. The reamer of claim 1, wherein the interface structure is fixedly attached to the inside of the dome via a junction located approximately at the apex of the dome.
7. The reamer of claim 1, wherein the interface structure is fixedly attached to the inside of the dome in regions substantially along the latitudinal plane of the interface.
- 25 8. The reamer of claim 2, wherein the section removed from the dome renders the dome asymmetrical.
9. The reamer of claim 1, wherein the interface structure is a portion of at least one cross bar.
10. The reamer of claim 1, wherein the interface structure comprises at least two,  
30 equally spaced apart cross bars.
11. The reamer of claim 1 wherein the interface structure is fixedly attached to the inside of the dome by a single cross bar having a central centering boss.



- 8 -

12. The reamer of claim 1 wherein the interface structure is fixed to the inside of the dome by a single cross bar having a central centering hole.
13. A surgical reamer assembly comprised of
  - (a) a hollow reamer having an inset interface structure, and
  - 5 (b) an angled reamer spindle having a coupling, wherein the reamer and the spindle are attached together via the inset interface structure and the coupling, the assembly providing for minimum invasiveness of orthopedic surgery.



Fig.3

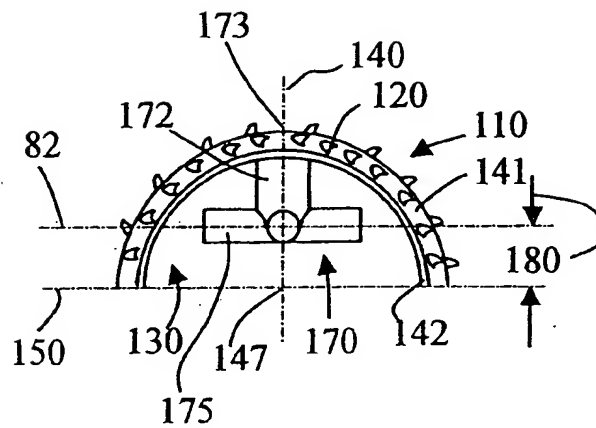


Fig.4

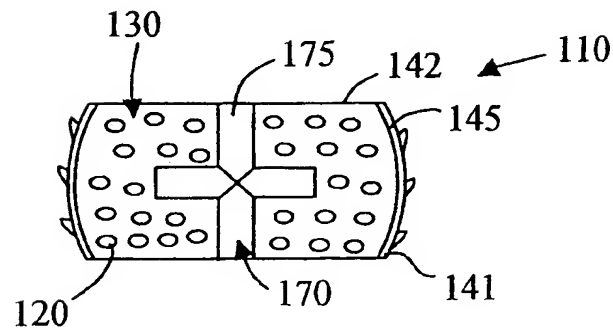


Fig.5

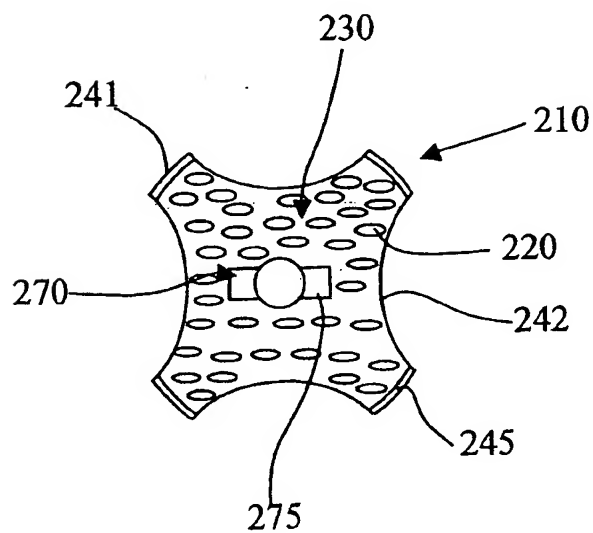
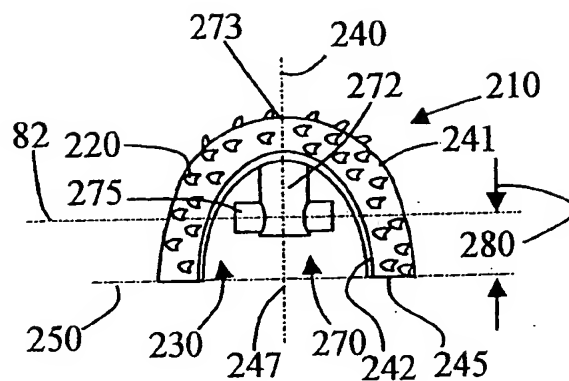


Fig.6

Fig.7

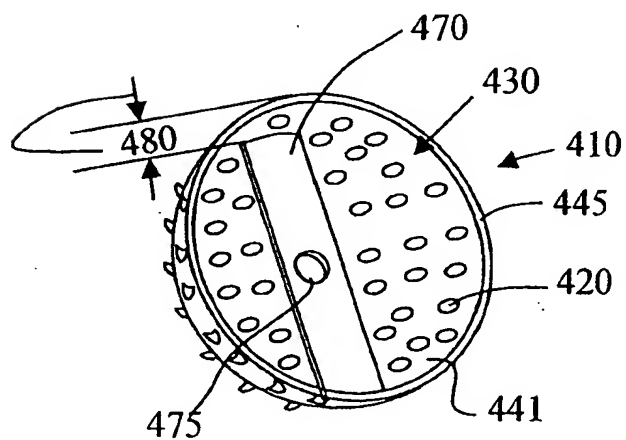
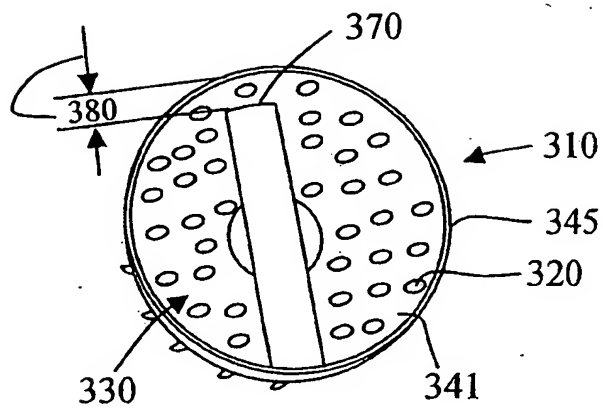


Fig.8

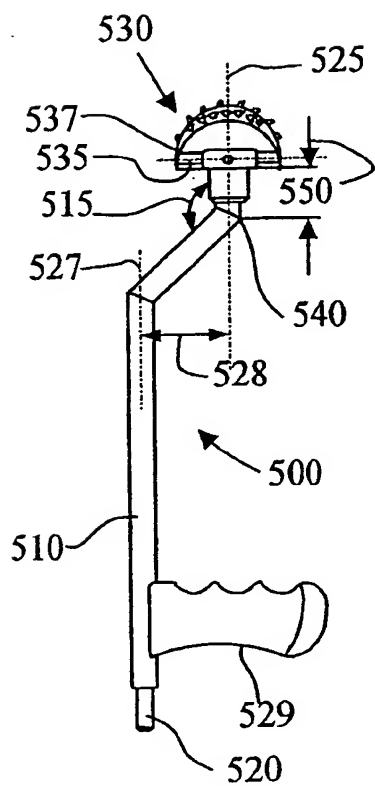


Fig.9

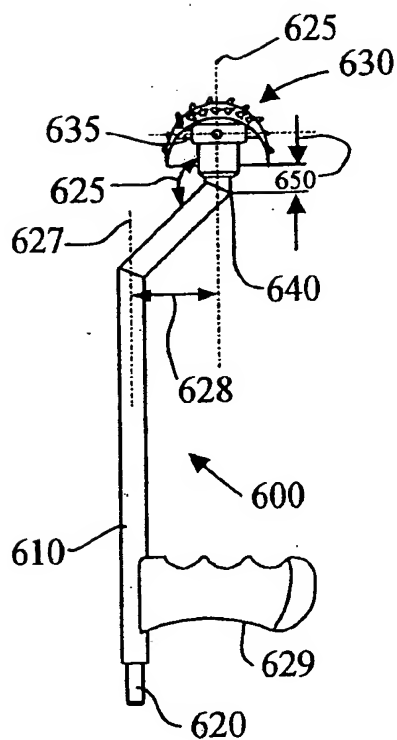


Fig.10

## INTERNATIONAL SEARCH REPORT

PCT/IB 03/04008

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 A61B17/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 195 32 898 A (L.ELHAMI) 13 March 1997 (1997-03-13)	1,2,6,7
Y	column 6, line 16 - line 17; figure 21	13
X	US 4 023 572 A (H.WEIGAND ET AL) 17 May 1977 (1977-05-17)	1,2,9,12
Y	cited in the application column 5, line 42 - line 46; figures 1,18,19	10,11
Y	US 5 658 290 A (A.LECHOT) 19 August 1997 (1997-08-19)	10
	cited in the application figure 1	
Y	EP 1 066 796 A (OTHY) 10 January 2001 (2001-01-10)	11
	figure 1	
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

26 November 2003

Date of mailing of the international search report

03/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Nice, P

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB 03/04008

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 176 711 A (J.B.GRIMES) 5 January 1993 (1993-01-05) figures 7C-7E	13
A	WO 01 76490 A (N.CHAUVIN ET AL) 18 October 2001 (2001-10-18) page 3	1,2,6,7



Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19532898	A	13-03-1997	DE 19532898 A1	13-03-1997
US 4023572	A	17-05-1977	DE 2437772 A1	19-02-1976
			DE 2500959 A1	15-07-1976
			AT 345445 B	11-09-1978
			AT 592675 A	15-01-1978
			AU 496894 B2	09-11-1978
			AU 8371575 A	10-02-1977
			BE 832138 A1	01-12-1975
			CA 1031945 A1	30-05-1978
			CH 583022 A5	31-12-1976
			FR 2281095 A1	05-03-1976
			GB 1487647 A	05-10-1977
			IT 1041493 B	10-01-1980
			JP 51076899 A	03-07-1976
			LU 73152 A1	02-03-1976
			NL 7509389 A	10-02-1976
US 5658290	A	19-08-1997	CH 690021 A5	31-03-2000
			DE 69524703 D1	31-01-2002
			DE 69524703 T2	08-08-2002
			EP 0704191 A1	03-04-1996
EP 1066796	A	10-01-2001	EP 1066796 A1	10-01-2001
US 5176711	A	05-01-1993	NONE	
WO 0176490	A	18-10-2001	AU 4041201 A	23-10-2001
			WO 0176490 A1	18-10-2001
			EP 1274352 A1	15-01-2003

**THIS PAGE BLANK (USPTO)**